

# IC SOCKETS

DUAL INLINE - SINGLE INLINE

## SPECIFICATIONS

### Material:

**Insulator:** PBT glass reinforced, thermoplastic, rated UL 94V-0  
**Contacts:** Phosphor Bronze

### Plating:

100  $\mu$ m bright tin-lead plate to over  
 50  $\mu$ m copper underplate

## ORDERING INFORMATION

choose one from each category as shown in sample below


IC	6	28
Series	Row Spacing	Positions
IC - Dual Inline Socket	IC Series only. Leave this column blank for SI Series	*06 Thru 48 *Depending on series
SI - Single Inline Socket	3 - .300" row spacing Positions: 06, 08, 14, 16, 18, 20, 24, 28 6 - .600" row spacing Positions: 20, 24, 28, 32, 40, 48	

### Electrical:


**Operation voltage:** 250 VAC max  
**Current rating:** 1 Amp max  
**Contact resistance:** 20 m $\Omega$  max



## SI SERIES SINGLE INLINE SOCKET

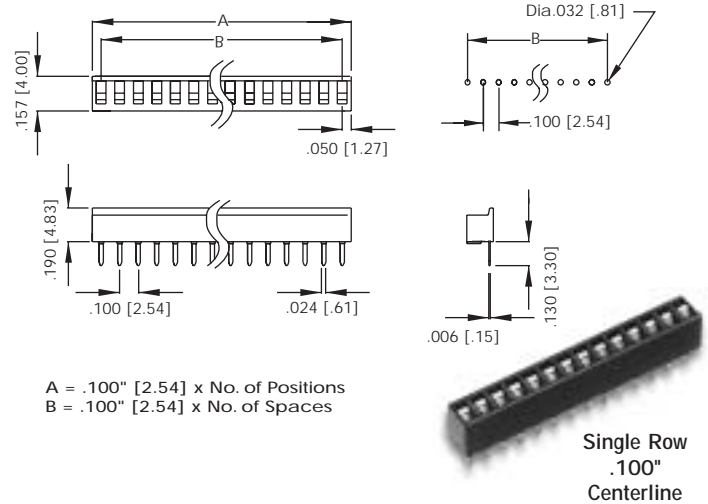

## IC SERIES .300" SOCKET

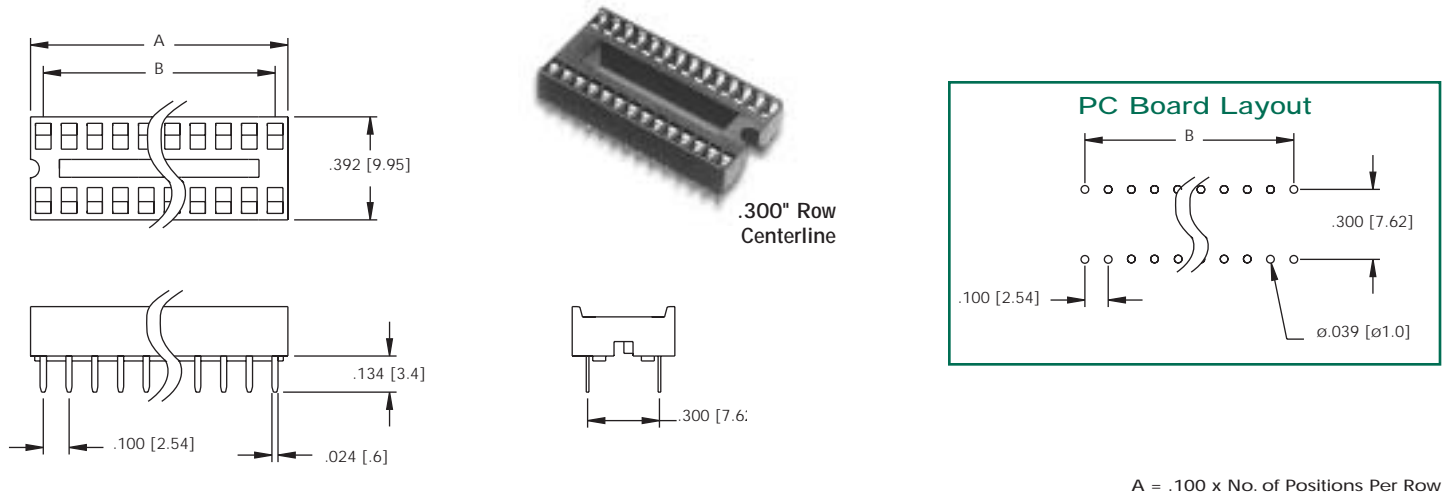

## IC SERIES .600" SOCKET

